

FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS

Introducing the
Dutemänn Glide-S

with slim-line aluminium profile





Discover **Dutemänn Glide-S**
the sliding door that won't compromise
on energy efficiency or design...


Dutemänn Glide-S is representative of cutting-edge beauty and design. The robust frame is supported by the ultra-slim profile and accented by the artfully fashioned contemporary handles providing unobstructed views.

Every Dutemänn Glide-S delivers the highest expectations of marrying design and energy efficiency. Offering fully weathered thresholds and thermal efficiency through a choice of double or triple glazing.



Dutemänn Glide-S 47mm slim-line aluminium profile

- ✓ 47mm Mullion
- ✓ Mono Track
- ✓ Double Track
- ✓ Bead Glazed
- ✓ 28mm Low Threshold
- ✓ Up to 400Kgs Per Sash

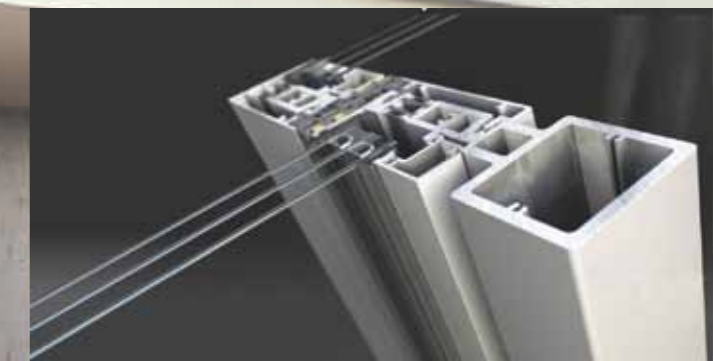


Ultra Slim Sightlines
47mm mullion

**Make the most of a wonderful vista.....
let the light flood in with virtually
uninterrupted views.**

Dutemänn Glide-S 47mm slim line is suited to large apertures with a maximum panel span of up to 3.35 meters wide and up to 3.2 metres high, at the same time the slim mullion option affords maximum light and views for the smaller door.

Dutemänn Glide-S 94mm slim-line aluminium profile

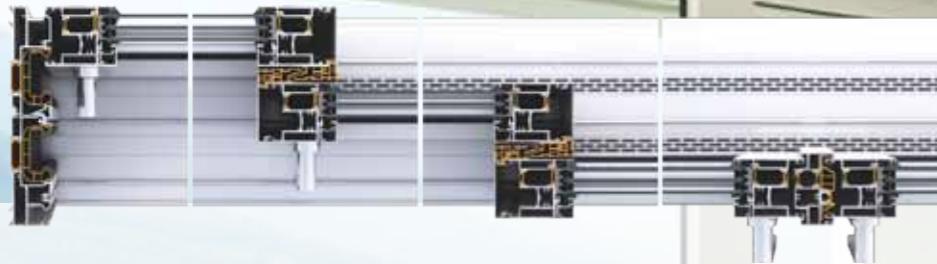

Triple Track **94mm mullion**

Dutemänn Glide-S triple track offers endless possibilities, with all panels being able to glide allowing the full use of your internal/external space. By choosing the triple track option two thirds of the aperture can be open allowing for modern open plan living

For large or small apertures Glide-S triple track make s a superb alternative to Dutemänn Bi-folding doors

Our unique Glide-S sliding mechanism lifts the sash to deliver smooth effortless operation and performance of up to 400 kilos per panel. The reinforced frame allows for extended openings, maintaining superb unhindered views of wonderful vistas. Making the most of the natural light and creating inspiring living spaces .

- ✓ 94mm Mullion
- ✓ Pocket Glide
- ✓ Mono Track
- ✓ Double Track
- ✓ Triple Track
- ✓ Bead Glazed
- ✓ 28mm Low Threshold
- ✓ Up to 400Kgs Per Sash



Dutemänn Glide-S Pocket



Capitalize on brightening and inspiring spaces with maximum glass areas spanning up to 6.7m wide and up to 3.2m in height in just two panels.

- ✓ Pocket Glide
- ✓ Mono Track
- ✓ Double Track
- ✓ Bead Glazed
- ✓ 28mm Low Threshold
- ✓ Up to 400Kgs Per Sash



Glide and Hide Pocket Sliding Door

The Dutemänn Glide-S Pocket Sliding Door is an aluminium glider that tucks away to create more space. Designed to meet the need of a wide variety of markets including; residential, hotels, restaurants and other commercial applications.

Dutemänn Glide-S pocket offers all the features of the Glide-S range including our unique lift and glide mechanism with its 400 kilo per panel capability.

However Glide-S pocket is very different, this fully weathered system can disappear into a pre-prepared cavity offering over 90% clear opening. Glide-S pocket offers the architect a modern solution for every client either residential or commercial.

Dutemänn Glide-S redefines the inline sliding door




Dutemänn Glide-S redefines expectations of patio doors by implementing these industry leading concepts as standard with each door. Providing a 10-year guarantee, Dutemänn delivers to exacting ideals and limitless possibilities.

The harmonisation of slim sight-lines and our superb lift mechanism means Dutemänn Glide-S provides architectural flexibility and design for any patio door installation. Appealing for contemporary new build, high rise and roof-tops yet gracious for more traditional installations, Dutemänn Glide-S can meet the various needs of every project.

Track Options

Dutemänn Glide-S has it covered; offering mono, double, triple and pocket track options, allowing for various combinations of both fixed and opening sashes.

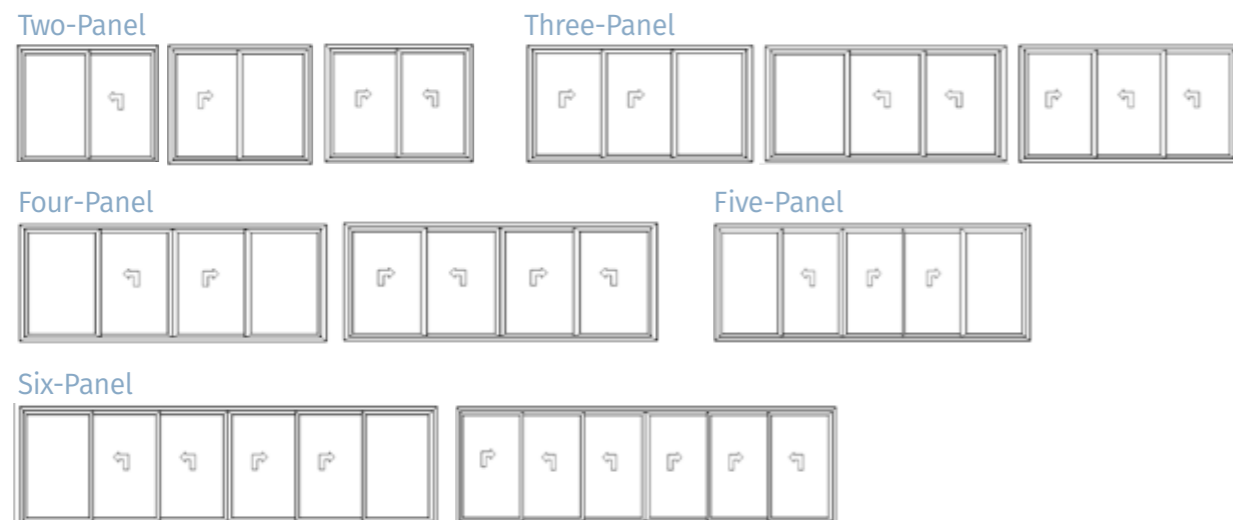

Effortless Opening

Unique Glide gearing system lifts sashes on the operation of the door handle to deliver effortless opening and closing of panels of up to 400 kilos per panel.

Glide-S is the only system to use solid stainless steel tracks as standard, capable of supporting the 400 kgs panel weight.

Huge Flexibility

Exceptional structural integrity gives the system huge flexibility. Capable of spanning an aperture of up to 6.7m wide and up to 3.2m in height in just two panels, the system is ideal for spanning large spaces.

Thermal Efficiency

Thermally efficient thermal-break zone and cross-linked polyamide insulation. Capable of accommodating a sealed unit of up to 42mm including triple-glazed option to achieve U-value as low as 1.3w/m2.K

Security

Security is taken care of with the use of our high security multi point lock that is coupled with a high security half cylinder as standard. Once the panels are in the locked position the glass adds its weight to enhance the security with the load resting on our unique track braces. Glass is held in place with security internal glazing beads.


Weatherproof

Industry leading threshold drainage system along with the system resting on multiple weather seals when closed meaning exceptional weather tightness.

Colours

We have developed a standard colour range which maximises the appeal but also suitability of Dutemänn Glide-S to a wide range of installations, we're also able to offer a non-standard choice of up to 200 RAL colours including marine finish and up to 30 different anodised finishes.

Sophisticated water evacuation system

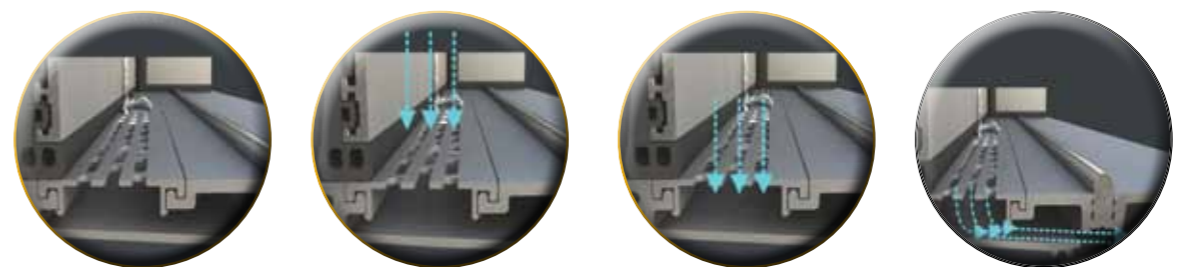

Your Dutemänn Authorised Installer

Dutemänn Glide-S



DUTEMÄNN
exceeds expectations



Dutemänn is a trade manufacturer of quality aluminium composite entrance doors, patio doors and bifold doors. We work as a specialist aluminium door supplier to installers, developers and builders. We also supply other fabrication businesses who don't want to disrupt their core production to manufacture a non-core product.

Dutemänn UK Limited

R3 Lower Road • Northfleet Industrial Estate • Northfleet • Kent DA11 9SN
T +44 (0)1322 771213 • E sales@dutemann.co.uk
www.dutemann.co.uk